


# TR 60M All Black 425-445 Watt Mono-facial

Tiling Ribbon (TR) Technology

Positive power tolerance of 0~+3%

## TIGER Pro

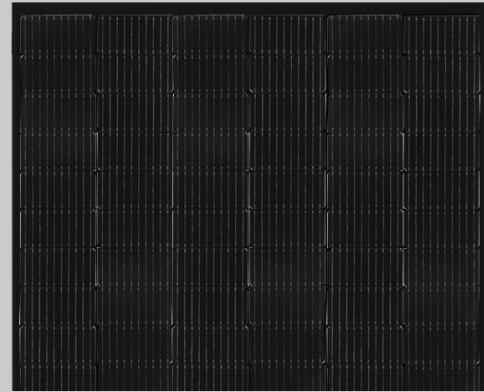

### KEY FEATURES



#### TR technology + Half Cell

TR technology with Half cell aims to eliminate the cell gap to increase module efficiency (mono-facial up to 21.24%)



#### MBB instead of 5BB

MBB technology decreases the distance between bus bars and finger grid line which is benefit to power increase.



#### Higher lifetime Power Yield

2.0% first year degradation,  
0.55% linear degradation



#### Best Warranty

12 year product warranty,  
25 year linear power warranty




#### Strengthened Mechanical Support

5400 Pa snow load, 2400 Pa wind load



### LINEAR PERFORMANCE WARRANTY



12 Year Product Warranty • 25 Year Linear Power Warranty  
0.55% Annual Degradation Over 25 years

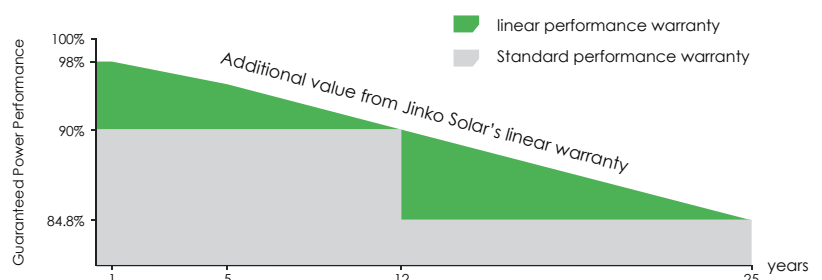

ISO9001:2015, ISO14001:2015, ISO45001:2018 certified factory

IEC61215, IEC61730 certified product

## Engineering Drawings

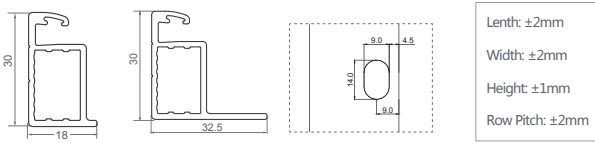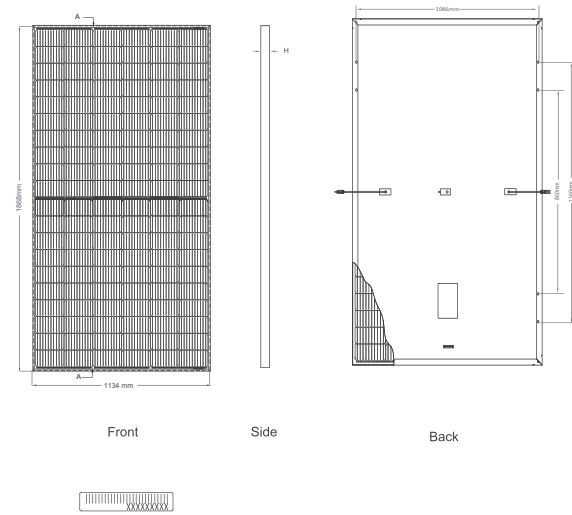


## Packaging Configuration

( Two pallets = One stack )

35pcs/pallets, 70pcs/stack, 840pcs/ 40'HQ Container

## Electrical Performance & Temperature Dependence

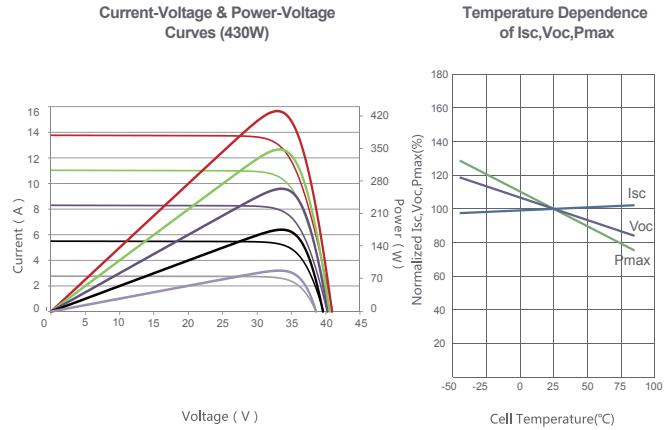

## Mechanical Characteristics

Cell Type	P type Mono-crystalline
No. of cells	120 (2×60)
Dimensions	1868×1134×30mm (73.54×44.65×1.18 inch)
Weight	24.2 kg (53.35 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Output Cables	TUV 1×4.0mm <sup>2</sup> (+): 290mm, (-): 145 mm or Customized Length

## SPECIFICATIONS

Module Type	JKM425M-6TL4-B		JKM430M-6TL4-B		JKM435M-6TL4-B		JKM440M-6TL4-B		JKM445M-6TL4-B	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	425Wp	316Wp	430Wp	320Wp	435Wp	324Wp	440Wp	327Wp	445Wp	331Wp
Maximum Power Voltage (Vmp)	33.28V	31.04V	33.47V	31.21V	33.65V	31.37V	33.82V	31.53V	34.00V	31.69V
Maximum Power Current (Imp)	12.77A	10.19A	12.85A	10.25A	12.93A	10.32A	13.01A	10.38A	13.09A	10.45A
Open-circuit Voltage (Voc)	40.38V	38.11V	40.57V	38.29V	40.75V	38.46V	40.92V	38.62V	41.10V	38.79V
Short-circuit Current (Isc)	13.45A	10.86A	13.53A	10.93A	13.61A	10.99A	13.69A	11.06A	13.77A	11.12A
Module Efficiency STC (%)	20.06%		20.30%		20.54%		20.77%		21.01%	
Operating Temperature(°C)	-40°C~+85°C									
Maximum system voltage	1000V DC(IEC)									
Maximum series fuse rating	25A									
Power tolerance	0~+3%									
Temperature coefficients of Pmax	-0.35%/°C									
Temperature coefficients of Voc	-0.28%/°C									
Temperature coefficients of Isc	0.048%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									

\* STC: ☀ Irradiance 1000W/m<sup>2</sup> 📖 Cell Temperature 25°C ☁ AM=1.5  
 NOCT: ☀ Irradiance 800W/m<sup>2</sup> 📖 Ambient Temperature 20°C ☁ AM=1.5 🌀 Wind Speed 1m/s